



SHINING 3D

EinScan H2

High Texture Resolution
Handheld 3D Scanner

Hybrid LED &
Infrared Light Source




Authorized Reseller

Strategic 3D Solutions, Inc.
4805 Green Road, Suite 114
Raleigh, NC 27616
919-451-5963
info@strategic3dsolutions.com
<https://strategic3dsolutions.com/>

Key Features



**3 Infrared VCSEL
Projectors**



**Data Acquisition
Camera**



**5MP Texture
Camera**




**White Light
Projector**

Hybrid Light Source

Dual light sources improve scanning efficiency. LED light offers fast 3D scanning with accurate, high-quality data.

- Various scenes from small to large
- Scanning speed: 1,200,000 points/s
- Accuracy: Up to 0.05mm
- Point distance: Up to 0.2mm

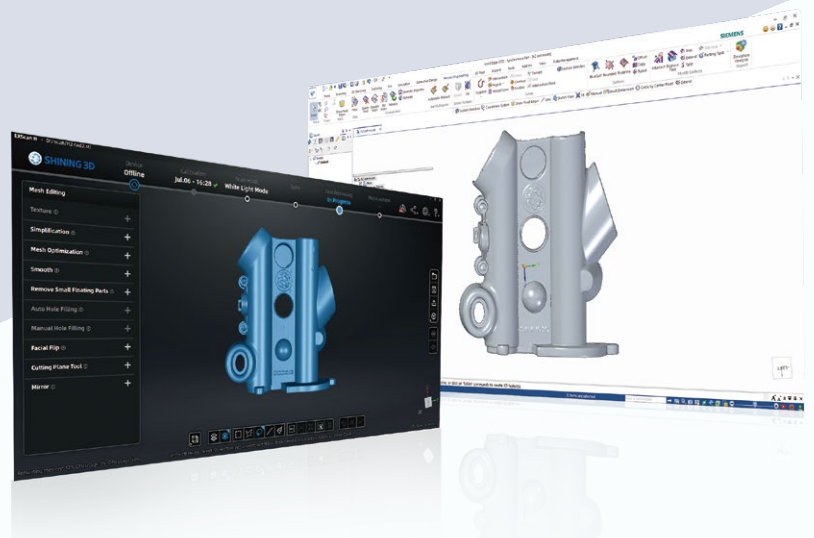

Infrared VCSEL is ideal for capturing dark surfaces, for human body scanning, and for bright-lit environments.

- ✓ **Dark color objects**
- ✓ **Human body scan**
- ✓ **Outdoor scan**

- Accuracy: Up to 0.1mm
- Point distance: Up to 0.2mm



Optimized for Face and Body 3D Scanning

Flashless infrared technology

Ensures optimal comfort during face and body 3D scanning.

Advanced hair enhancement algorithm

Designed to successfully capture light and dark hair.


Non-rigid algorithm in IR Mode

Captures 3D body data quickly and seamlessly, with auto-compensation of slight movements to eliminate misalignment risks.



→
Original Face


←
EinScan H2
Scanned Data

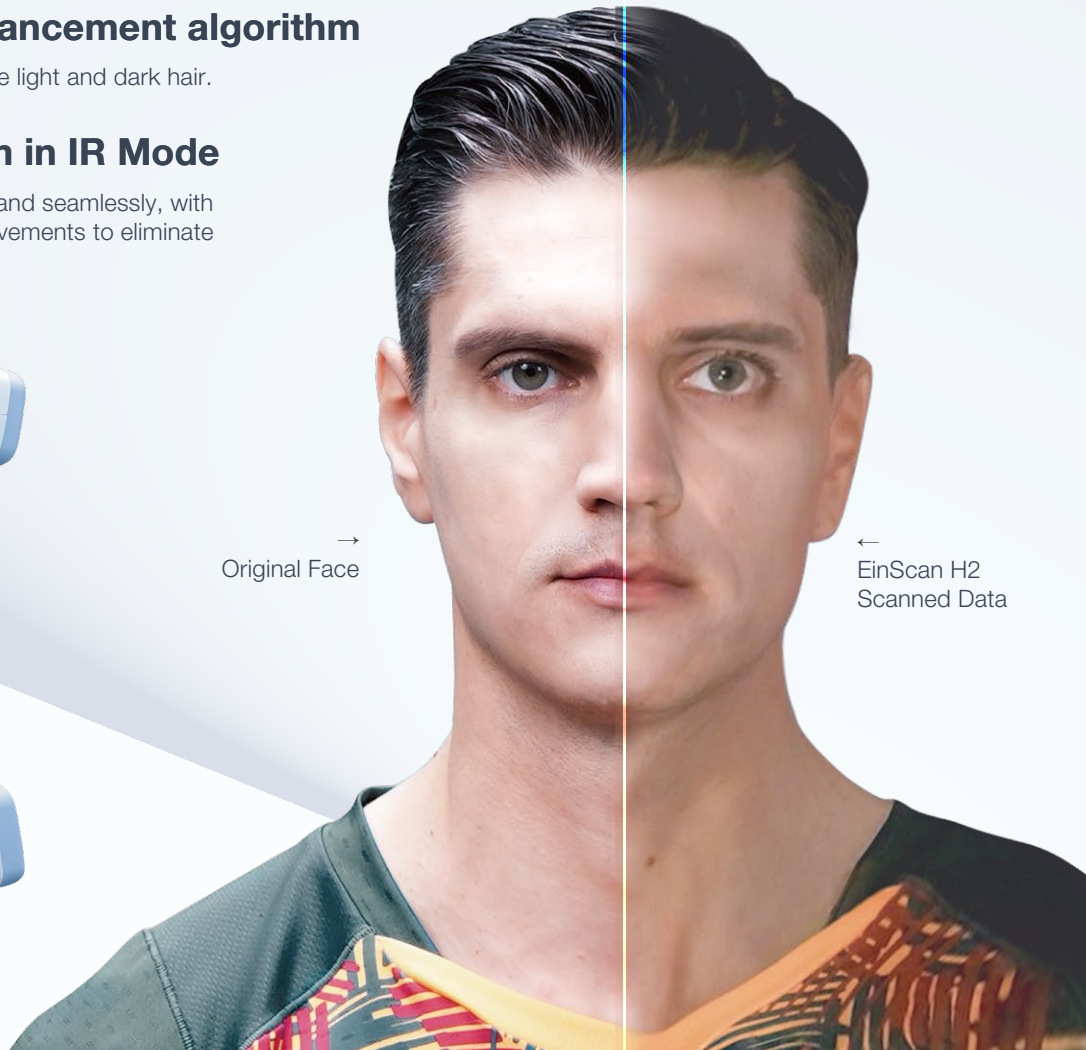

User-Friendly Design

Remarkable scanning software

Delivers a professional easy-to-use 3D scanning interface with automated processing, intuitive UI design, and intelligent data quality indicators.

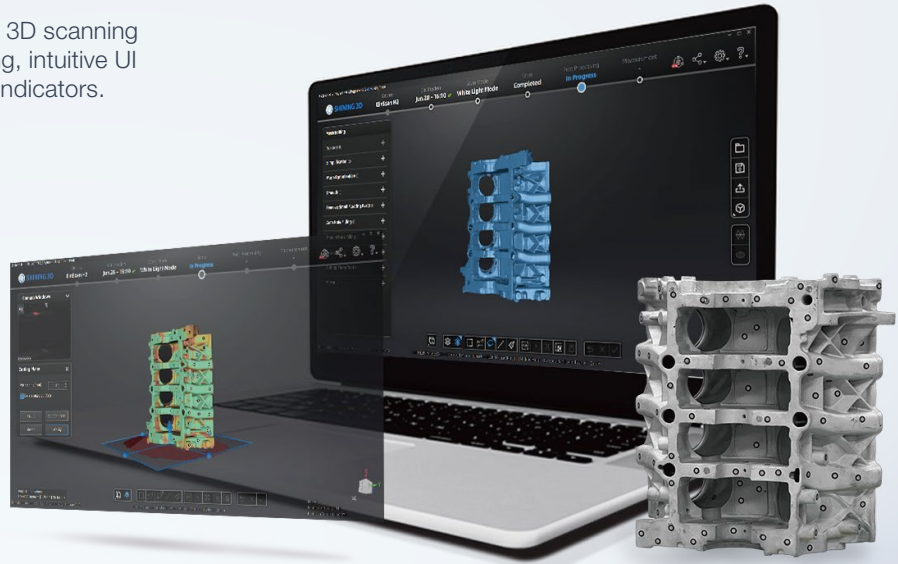


Ergonomic design

The EinScan H2 is portable, easy to grasp, and intuitive to operate.

Develop Your Own Scanning App with EinScan H2 SDK

The EinScan H2 scanning SDK is available and open for customization! Integrate our powerful scanning and data processing into your self-developed software or app.

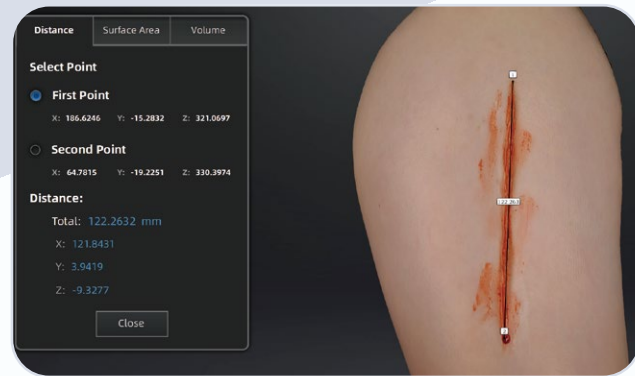

→
Forensic Science



→
Prosthetics and Orthotics

TECHNICAL SPECIFICATIONS

EinScan H2

Scan Mode	White Light Mode	IR Mode
Light Source	White LED Light, Visible	Infrared VCSEL Light, Invisible
Scan Accuracy	Up to 0.05mm	Up to 0.1mm
Volumetric Accuracy	0.05mm ± 0.1mm/m	0.1mm ± 0.3mm/m
Point Distance	0.2mm–3mm	
Best Working Distance	470mm	
Effective working Distance Range	200mm–700mm	200mm–1500mm
Maximum FOV	420mm*440mm	780mm*900mm
Scan Speed	1,200,000points/s	1,060,000points/s
Texture Resolution	5MP	
Align Modes	Markers Alignment, Feature Alignment, Hybrid Alignment, Texture Alignment	Feature Alignment, Hybrid Alignment, Texture Alignment, Global Markers
Safety	LED light (eye-safe)	CLASS I (eye-safe)
Built-in Color Camera	Yes	
Texture Scan	Yes	
Included Software	EXScanH; Solid Edge SHINING 3D Edition	
Output Formats	OBJ, STL, ASC, PLY, P3, 3MF	
Scanner Size	108 mm*110 mm*237 mm	
Scanner Weight	731.1 g	
Operating Temperature Range	0° C ~ 40° C	
Operating Humidity Range	10% RH ~ 90% RH	
Certifications	CE, FCC, ROHS, WEEE, KC	
Interface	USB 3.0	
Input Voltage	DC: 12 V, 5.0 A	
Recommended Configuration	OS: Win10/11, 64-bit; Graphics card: NVIDIA GTX/RTX, RTX2060 or better; Video memory: ≥6GB; Processor: Intel I7–11700 or better; Memory: ≥64GB	
Required Configuration	OS: Win10, 64-bit; Graphics card: NVIDIA GTX1060; Video memory: ≥4GB; Processor: Intel I7–8700; Memory: ≥16GB	